

## Chassis Monitor



26"(16:9)

### Specifications

Model Name	W26L100-CHA1
Viewable Size Image	26"(16:9)
Active Display Area(mm)	566.40(H)x339.84(V)
Pixel Pitch(mm)	0.4425x0.4425
Number of Pixels	1280x768
Contrast Ratio	600:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m <sup>2</sup> )	500
Viewing Angle(CR>=10)	-85~85(H); -85~85(V)
Synchronization Range	31.5~47.6KHz/50~60Hz
Horizontal/Vertical	
Recommended Resolution	1280x768@60Hz
Signal Connector	15 pin D-sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	145W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes


Remarks:W26L100 series= VGA input

W26L110series= VGA+Video input

The Hantarex Semi Pro range of small, LCD chassis displays are housed in sleek metal housings which give them a custom design look. Wall mounting is achieved using a rear VESA connection.

They are offered in many different sizes from 6.5" in a 4:3 format up to 26" in a 16:9 format. They all have a standard PC (VGA) input but in addition can have video (PAL) and DVI inputs The choice of screens is also impressive with standard, touch and transfective available.

### Mechanical Drawing

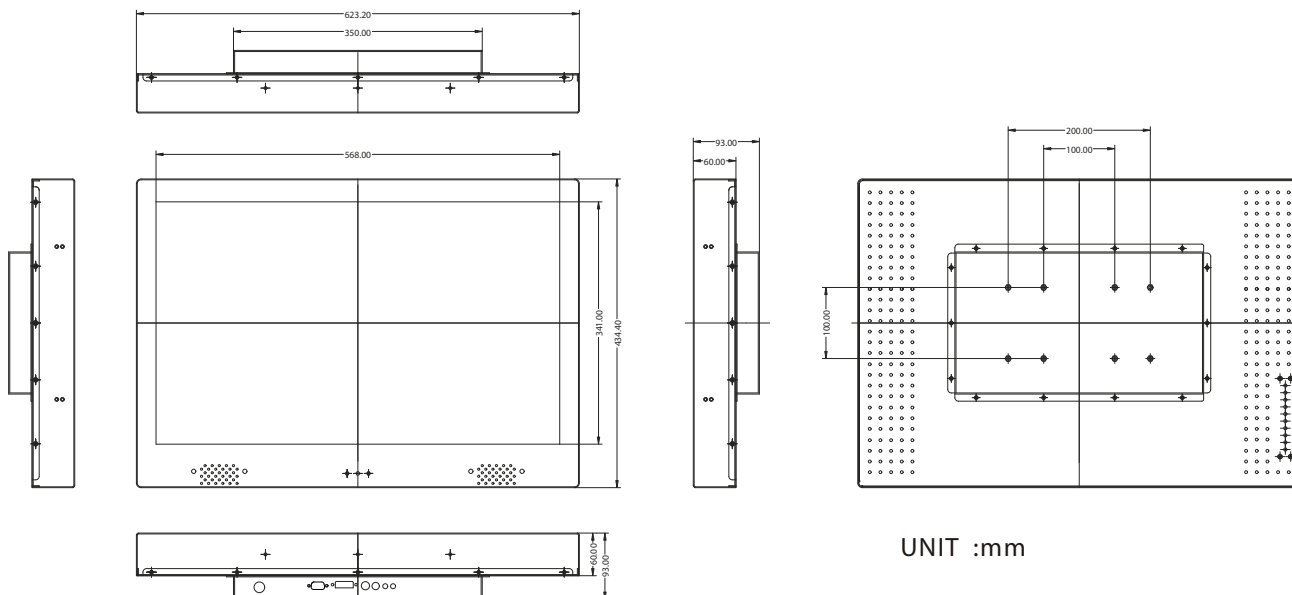

**Hantarex International Limited**

Unit 14 - Forest Hill Business Centre, Forest Hill, London SE23 3JF

Phone: +44(0)20 8778 1414 - e-mail: sales@hantarex.com - web: www.hantarex.com